

Volume controller

TSG-VC6F/VC30F/VC60F/VC120F


Speaker Volume Controller with Relay

Surety paging control with 24V relay | Compatible with speakers which have 100V LMT | White ABS housing | 4 Wire

Volume controller is used to adjust the loudspeaker output in the room with 24V surety paging control. It's available in power rating of 6W/30W/60W/120W so suitable for connection to a speaker or group of speakers. High wattage rotary switch with 5 selectable positions, maximum 5 attenuated position in 3dB steps. It enables the user to conveniently adjust the volume of the speaker or group of speakers. High level white UV-protected ABS material to integrate together with the white wall and architecture design. Surface wall mount or in-wall mounting box shall be purchased separately



Connection Details

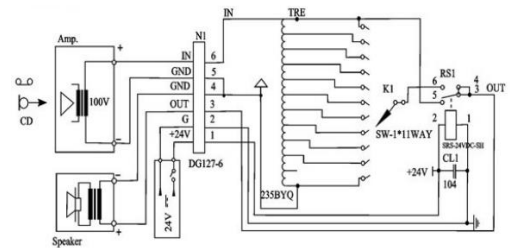

Technical Specifications

MODEL	TSG-VC6F	TSG-VC30F	TSG-VC60F	TSG-VC120F
Rated power, W	6	30	60	120
Input Voltage, V	100			
Surety Paging	With 24V Relay			
Attenuation steps	5x3 dB			
Material	UV-protected ABS			
Finish	White			
Mounting Way	Surface mount or in-wall mount			
Depth	50mm	60mm	60mm	60mm
Plate Dimension	86(W)×86(D)mm			