

Ceiling Loudspeaker

TSG-CP12

12W Ceiling Loudspeaker

6" Full range speaker | Good speech and music reproduction | Powder coated mesh grille and ABS frame

Ceiling-mounted PA loudspeakers is designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after-sound and high humidity. The Speaker is an economical ceiling loudspeaker for general purpose applications. It is a full range loudspeaker for speech and music reproduction in shops, department stores, schools, offices, stadiums, hotels, and restaurants.

Technical Specifications

MODEL

TSG-CP12

Electrical


Rated power/Max. Power, W	12/18
Tappings 100 V line, W	12/6/3
Frequency range(-10dB), Hz	60 - 20000
Sensitivity @ 1W, @(1Khz,1m), dB	91
SPL @ Rated Power, @(1Khz,1m), dB	102
Speaker unit size	6"
Dispersion Angle	170 deg

Mechanical


Dimensions, mm	205(OD) X 85(H)
Color	White
Weight, Kg	0.760
Material	ABS with metal grille
Mounting	Spring clamp
Cut-out, mm	ø170



Circuit Diagram

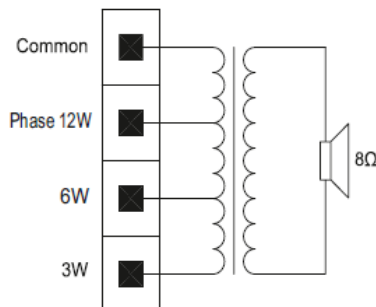

Frequency Response

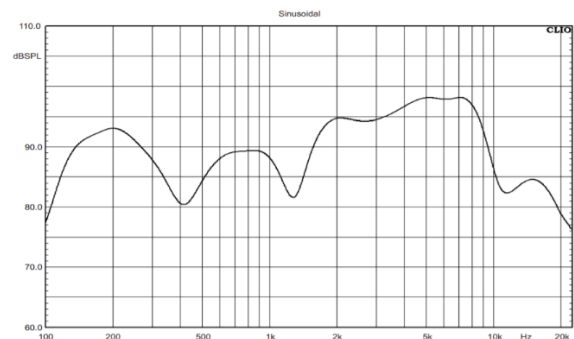

Products are continually improved. All specifications are subject to change without prior notice | V1.1 | 04062024 | For more information, contact techsupport@tsgaudioinnovation.com