

Ceiling Loudspeaker



TSG-CP6(4")

6W Ceiling Loudspeaker

Aesthetic design | Good speech and music reproduction | Fully ABS with metal grille


Ceiling-mounted PA loudspeakers is designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after-sound and high-humidity. The Speaker is an economical ceiling loudspeaker for general purpose applications. It is a full range loudspeaker for speech and music reproduction in shops, department stores, schools, offices, stadium, hotels, and restaurants.

Technical Specifications


MODEL	TSG-CP6(4")
Electrical	
Rated power/Max. Power, W	6/9
Tappings 100 V line, W	6/3/1.5
Frequency range(-10dB), Hz	125 - 16000
Sensitivity @ 1m, 1W (dB)	88
SPL @ 1m, Rated power (dB)	95
Speaker unit size	4"
Dispersion Angle	170 deg
Mechanical	
Dimensions, mm	150(OD) X 70(H)
Color	Opal White
Weight, Kg	0.460
Material	ABS with metal grille
Mounting	Spring clamp
Cut-out, mm	ø112



Circuit Diagram

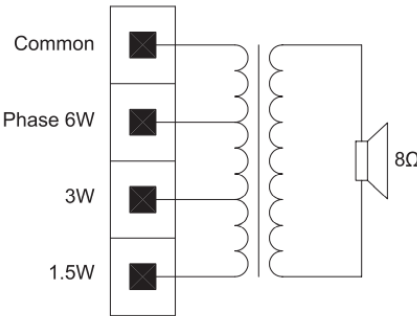

Frequency Response

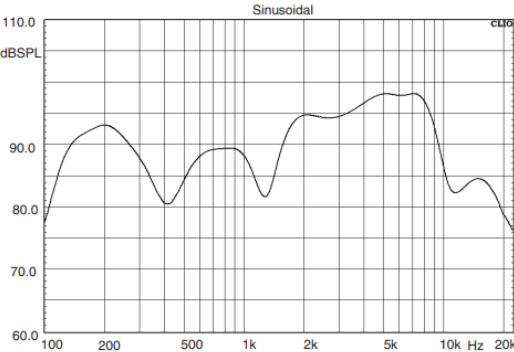

Products are continually improved. All specifications are subject to change without prior notice | V1.1 | 04062024 | For more information, contact techsupport@tsgaudioinnovation.com