

Ceiling Loudspeaker

TSG-CP6

6W Ceiling Loudspeaker

Aesthetic design | Good speech and music reproduction | Fully ABS with metal grille

Ceiling-mounted PA loudspeakers are designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after sound and high humidity. The Speaker is an economical ceiling loudspeaker for general purpose applications. It is a full range loudspeaker for speech and music reproduction in shops, department stores, schools, offices, stadiums, hotels, and restaurants.

Technical Specifications

MODEL


TSG-CP6

Electrical


Rated power/Max. Power, W	6/9
Tapping's 100 V line, W	6/3/1.5
Frequency range(-10dB), Hz	80 - 20000
Sensitivity @ 1W, @(1Khz,1m), dB	88
SPL @ Rated Power, @(1Khz,1m), dB	96
Speaker unit size	5"
Dispersion Angle	170 deg

Mechanical

Dimensions, mm	185(OD) X 70(H)
Color	Opal White
Weight, Kg	0.520
Material	ABS with metal grille
Mounting	Spring clamp
Cut-out, mm	ø157

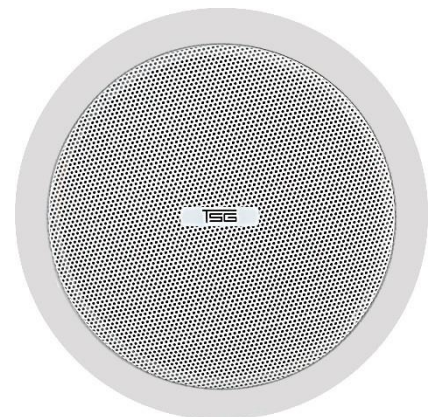

Circuit Diagram

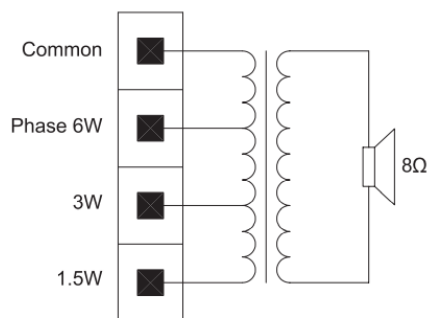

Frequency Response

