

Ceiling Loudspeaker

TSG-CSK56X

6W Ceiling Loudspeaker

5" driver | ABS enclosure and metal grille

TSG-CSK56X is a quick mount ceiling speaker. Ceiling-mounted PA loudspeakers are designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after sound and high humidity. It is a full range loudspeaker for speech and music reproduction in shops, department stores, schools, offices, stadiums, hotels, and restaurants.

Technical Specifications

MODEL TSG-CSK56X

Electrical


Rated power/Max. Power, W	6
Tapping's 100 V line, W	6/3
Frequency range(-10dB), Hz	100 - 15000
Sensitivity @ 1W, @(1Khz,1m), dB	89±3
Speaker unit size	5" Dual cone
Dispersion Angle	170 deg

Mechanical


Dimensions, mm	Φ203×80
Color	White
Weight, Kg	0.7
Material	ABS enclosure and metal grille
Mounting	Spring clamp
Cut-out, mm	Φ170 mm



Dimension & Mounting

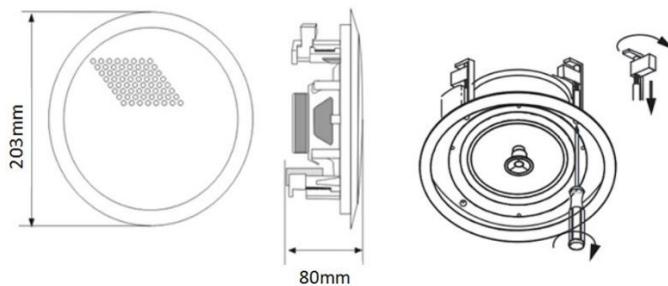

Frequency Response

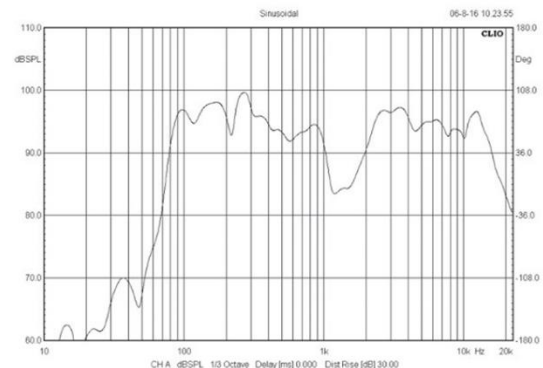

Products are continually improved. All specifications are subject to change without prior notice | V1.1 | 04062024 | For more information, contact techsupport@tsgaudioinnovation.com