

Ceiling Loudspeaker

TSG-CSK66MC

6W Ceiling Loudspeaker with fire dome

6.5" driver | Metal enclosure with metal grille and fire dome

Where safety is of utmost importance the TSG-CSK66MC is the perfect fit. Combining a 6.5" driver this speaker delivers great performance across the frequency spectrum. These speakers find their application in shopping malls, lecture halls, corporate offices, cafeterias, and venues that require good speech and music reproduction. The fire-dome is an accessory added in-order to use the same speaker for EVAC purposes. The full metal fire dome provides added protection to the speaker in the event of a fire accident.

Technical Specifications

MODEL TSG-CSK66MC

Electrical


Rated power/Max. Power, W	6.6
Tapping's 100 V line, W	6/3
Frequency range(-10dB), Hz	100 - 18000
Sensitivity @ 1W, @(1Khz,1m), dB	92±3dB
Speaker unit size	6.5" Full range
Dispersion Angle	170 deg

Mechanical


Dimensions, mm	Φ200×90mm
Color	White
Weight, Kg	0.9
Material	Metal enclosure, metal grill and metal fire dome
Mounting	Spring clamp
Cut-out, mm	Φ175mm



Dimension

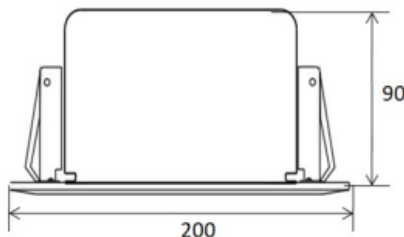

Frequency Response

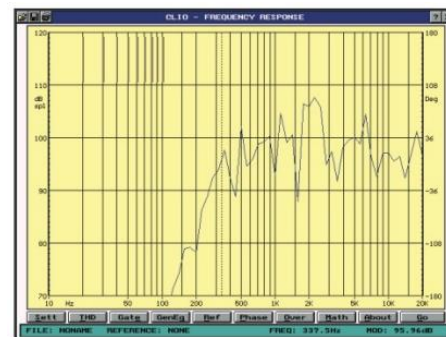

Products are continually improved. All specifications are subject to change without prior notice | V1.1 | 04062024 | For more information, contact techsupport@tsgaudioinnovation.com